

- ✓ 360° smooth rotation, rated to 4000psi
- ✓ Sealed bearing design
- ✓ Multiple industrial application
- ✓ High flow versions available

The classic straight ceiling boom has uses in many industrial fields. A few examples are car wash, food processing, mining and manufacturing. A real all-around product with versatile applications anywhere liquids, air or gas are used. An additional advantage is the extended reach.



### DKP

Part No.	L	Weight
66.009	4'9"	21 lbs
66.019	5'3"	22 lbs
66.029	5'9"	22.5 lbs
66.039	6'3"	23 lbs
66.049	6'9"	24 lbs

Part No.	L	Weight
66.059	7'5"	24.5 lbs
66.069	8'2"	25 lbs
66.079	9'	26 lbs
66.089	9'10"	27 lbs
66.099	18'8"	39.5 lbs



### DKF (with flex-arm)

Part No.	L	Weight
66.509	4'9"	22.5 lbs
66.519	5'3"	23 lbs
66.529	5'9"	23.4 lbs
66.539	6'3"	25.8 lbs
66.549	6'9"	25.3 lbs


Part No.	L	Weight
66.559	7'5"	26.4 lbs
66.569	8'2"	27 lbs
66.579	9'	28.4 lbs
66.589	9'10"	30.2 lbs





### DP2 (two separate mediums in one ceiling boom)

Part No.	L	Weight
66.451	4'9"	24 lbs
66.452	5'3"	25 lbs
66.453	5'9"	25.5 lbs
66.454	6'3"	26 lbs
66.455	6'9"	27 lbs

Part No.	L	Weight
66.456	7'5"	27.5 lbs
66.457	8'2"	28 lbs
66.458	9'	29 lbs
66.459	9'10"	30 lbs



Bearable load for each bore at least 30'000 N (for example 1/2" bolt)

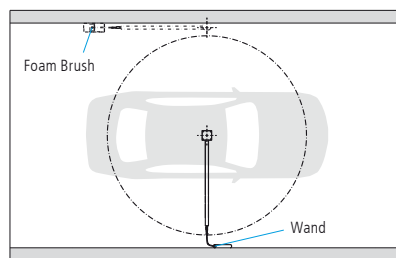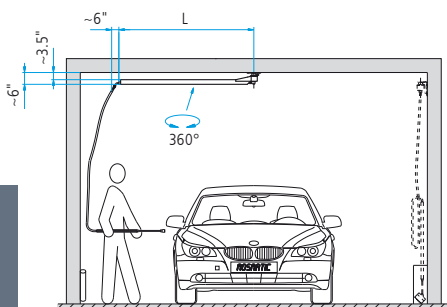

### TECHNICAL DATA

<b>Pressure</b>	4000 psi (27.5 MPa)
<b>Temperature</b>	250°F
<b>Inlet (top &amp; side)</b>	3/8" NPTF (other options available)
<b>Outlet</b>	3/8" NPTF (other options available)
<b>Throughput medium</b>	water, oil, air at pH 3-12

#### Legend

M.. = metric thrust, ..M = male, F = female, G = gas pipe thrust, QV = quick connects, SV = profile ring fitting  
 D = diameter, k = conical, L = length, NW = nominal width, SW = wrench size, IN = media input, OUT = media output, RS = basic position