


Removable Separation Weir

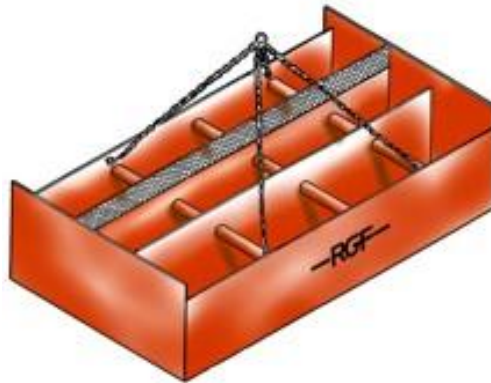

PRODUCT DESCRIPTION

RGF's Removable Separation Steel Weir Assembly is designed for heavy equipment washing [applications](#) with drive-in pits. Provides an efficient method of separating solids from the waste stream prior to system entry.

Provides an easy and convenient way of cleaning collection pit.

A separation screen keeps debris from floating into the sump compartment. Most sump pumps easily [install](#) and work with the RGF Separation Weir.

SPECIFICATIONS

Material: 3/8" Thick A-36 Carbon Steel

Compartments: 3

Finish: Industrial Red Oxide primer Finish Coats Available

Lift Chains: 3/8" HD Chain Sling

Screen Trap: 6"H x 8'L

Solids Capacity (TA-045): 1.75 Yards

Solids Capacity (TA-032): 2.5 Yards

Flow Rate (TA-045): 25 g.p.m.

Flow Rate (TA-032): 50 g.p.m.

Dimensions (TA-045): 2'H x 8'L x 4'W

Dimensions (TA-032): 2'H x 12'L x 4'W